
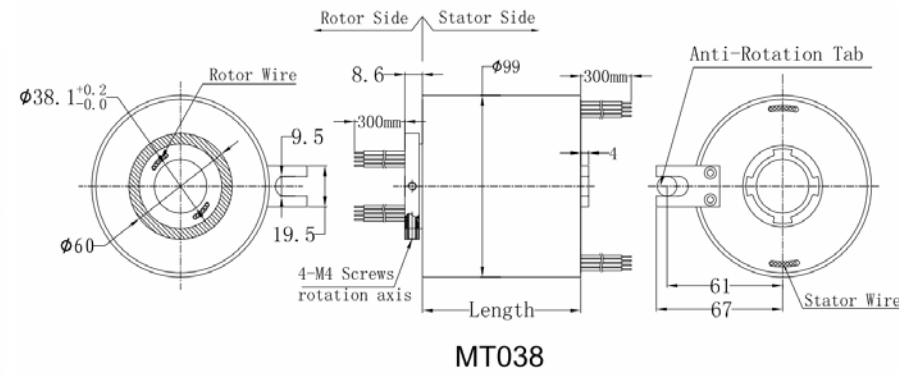


MT038 series

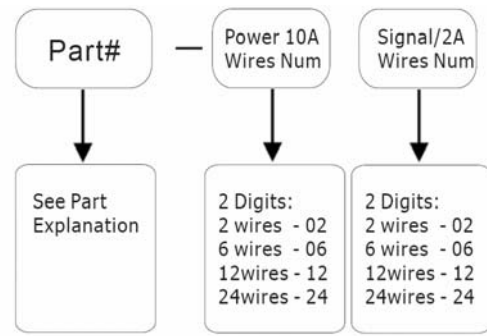

**\*Please note: 10A rings parallel can be used as multiple 10A current.**  
**For Example: 2 rings parallel could be used as 1 wires 20A**

MT03802 (Length=31.6mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03802-0200	2	0	MT03802-0002	0	2

MT03803 (Length=35mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03803-0300	3	0	MT03803-0003	0	3
MT03803-0102	1	2	MT03803-0201	2	1

MT03806 (Length=45mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03806-0600	6	0	MT03806-0006	0	6
MT03806-0204	2	4	MT03806-0402	4	2

MT03812(Length=65.5mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03812-1200	12	0	MT03812-0012	0	12
MT03812-0210	2	10	MT03812-0408	4	8
MT03812-0606	6	6	MT03812-0804	8	4
MT03812-1002	10	2			

MT03818 (Length=86mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03818-1800	18	0	MT03818-0018	0	18
MT03818-0216	2	16	MT03818-0414	4	14
MT03818-0612	6	12	MT03818-0810	8	10
MT03818-1008	10	8	MT03818-1206	12	6
MT03818-1404	14	4	MT03818-1602	16	2

MT03824(Length=106.4mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03824-2400	24	0	MT03824-0024	0	24
MT03824-0618	6	18	MT03824-1212	12	12
MT03824-1806	18	6			

MT03830 (Length=126mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03830-3000	30	0	MT03830-0030	0	30
MT03830-0624	6	24	MT03830-1218	12	18
MT03830-1812	18	12	MT03830-2406	24	6

MT03836 (Length=147mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03836-3600	36	0	MT03836-0036	0	36
MT03836-0630	6	30	MT03836-1224	12	24
MT03836-1818	18	18	MT03836-2412	24	12
MT03836-3006	30	6			

MT03842 (Length=167.6mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03842-4200	42	0	MT03842-0042	0	42
MT03842-0636	6	36	MT03842-1230	12	30
MT03842-1824	18	24	MT03842-2418	24	18
MT03842-3012	30	12	MT03842-3606	36	6

MT03848 (Length=188mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03848-4800	48	0	MT03848-0048	0	48
MT03848-0642	6	42	MT03848-1236	12	36
MT03848-1830	18	30	MT03848-2424	24	24
MT03848-3018	30	18	MT03848-3612	36	12
MT03848-4206	42	6			

MT03856 (Length=215mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03856-5600	56	0	MT03856-0056	0	56
MT03856-0650	6	50	MT03856-1244	12	44
MT03856-1838	18	38	MT03856-2432	24	32
MT03856-3620	36	20	MT03856-4808	48	8

MT03872(Length=269.6mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03872-7200	72	0	MT03872-0072	0	72
MT03872-1260	12	60	MT03872-2448	24	48
MT03872-3042	30	42	MT03872-3636	36	36
MT03872-4824	48	24	MT03872-6012	60	12

MT03896(Length=351mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT03896-9600	96	0	MT03896-0096	0	96
MT03896-1284	12	84	MT03896-2472	24	72
MT03896-3660	36	60	MT03896-4848	48	48
MT03896-6036	60	36	MT03896-7224	72	24