
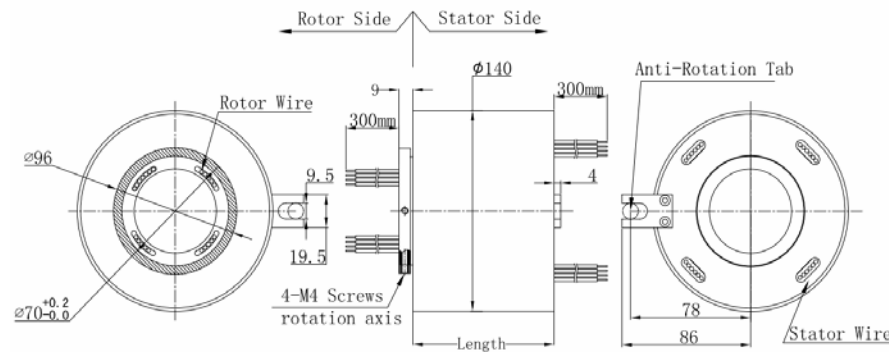


MT070 series

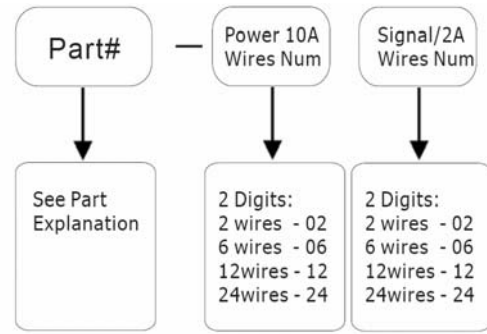

MT070

***Please note: 10A rings parallel can be used as multiple 10A current.
For Example: 2 rings parallel could be used as 1 wires 20A**

MT07002 (Length=42mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07002-0200	2	0	MT07002-0002	0	2

MT07003 (Length=46mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07003-0300	3	0	MT07003-0003	0	3
MT07003-0102	1	2	MT07003-0201	2	1

MT07006 (Length=58mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07006-0600	6	0	MT07006-0006	0	6
MT07006-0204	2	4	MT07006-0402	4	2

MT07012 (Length=82mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07012-1200	12	0	MT07012-0012	0	12
MT07012-0210	2	10	MT07012-0408	4	8
MT07012-0606	6	6	MT07012-0804	8	4
MT07012-1002	10	2			

MT07018 (Length=106mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07018-1800	18	0	MT07018-0018	0	18
MT07018-0216	2	16	MT07018-0414	4	14
MT07018-0612	6	12	MT07018-0810	8	10
MT07018-1008	10	8	MT07018-1206	12	6
MT07018-1404	14	4	MT07018-1602	16	2

MT07024 (Length=130mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07024-2400	24	0	MT07024-0024	0	24
MT07024-0618	6	18	MT07024-1212	12	12
MT07024-1806	18	6			

MT07030 (Length=154mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07030-3000	30	0	MT07030-0030	0	30
MT07030-0624	6	24	MT07030-1218	12	18
MT07030-1812	18	12	MT07030-2406	24	6

MT07036 (Length=178mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07036-3600	36	0	MT07036-0036	0	36
MT07036-0630	6	30	MT07036-1224	12	24
MT07036-1818	18	18	MT07036-2412	24	12
MT07036-3006	30	6			

MT07042 (Length=202mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07042-4200	42	0	MT07042-0042	0	42
MT07042-0636	6	36	MT07042-1230	12	30
MT07042-1824	18	24	MT07042-2418	24	18
MT07042-3012	30	12	MT07042-3606	36	6

MT07048 (Length=226mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07048-4800	48	0	MT07048-0048	0	48
MT07048-0642	6	42	MT07048-1236	12	36
MT07048-1830	18	30	MT07048-2424	24	24
MT07048-3018	30	18	MT07048-3612	36	12
MT07048-4206	42	6			

MT07056 (Length=262mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07056-5600	56	0	MT07056-0056	0	56
MT07056-0650	6	50	MT07056-1244	12	44
MT07056-1838	18	38	MT07056-2432	24	32
MT07056-3620	36	20	MT07056-4808	48	8

MT07072 (Length=322mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07072-7200	72	0	MT07072-0072	0	72
MT07072-1260	12	60	MT07072-2448	24	48
MT07072-3042	30	42	MT07072-3636	36	36
MT07072-4824	48	24	MT07072-6012	60	12

MT07096 (Length=418mm)					
Parts#	Power 10A	signal/2A	Parts#	Power 10A	signal/2A
MT07096-9600	96	0	MT07096-0096	0	96
MT07096-1284	12	84	MT07096-2472	24	72
MT07096-3660	36	60	MT07096-4848	48	48
MT07096-6036	60	36	MT07096-7224	72	24