


MHF800-SMA-8G6G

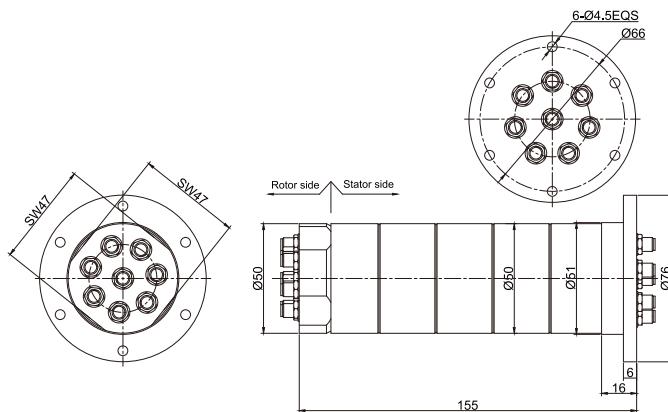

Rf channel characteristics

Channel	1	2	3	4	5	6	7	8
Frequency	0~8Ghz			0~6Ghz				
Interfaces				SMA-F(50Ω)				
Average power, max.				10W				
Vswr, Max.	1.5dB	1.5dB	1.6dB	1.6dB	1.6dB	1.6dB	1.6dB	1.6dB
Vswr Wow, Max				0.1dB				
Insertion Loss, max.	1.4dB	1.4dB	1.5dB	1.5dB	1.5dB	1.5dB	1.5dB	1.5dB
Insertion loss Wow, max.				0.15dB				
Isolation degree (minimum value)				70dB				

General mechanical data

Rotating speed, max.	60RPM
Torque force	≤0.51N.M
Working life (minimum)	5 million rpm
Relative temperature	95%
Operation temperature	-40°C~ + 65°C
Storage temperature	-50°C~ + 70°C
IP protection level	IP65
Humidity	GJB150.9A-2009
Vibrate	GJB150.16A-2009
Impact	GJB150.18A-2009