


MSP260 Separated Slip Rings

Bore size 60mm , 12 rings*10A

(Noted : It can be customized for the bore size and rings number according to customer's requirements)



MSP260 separated slip ring adopts a separated rotor and contact brushes combination, supporting 12 wires for signal or 10A. The exiting wires in stator and rotor are correspondingly six colored wires, it can simplify the electrical connection. The 90-degree angle V-groove design has the characteristics of smooth rotation, low torque and low electrical noise, which can exceed ordinary slip ring products.

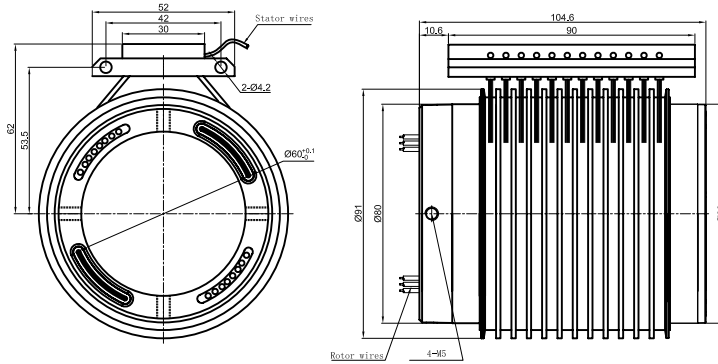

MSP2609 is the highest-end version of MSP260, which is used for military, aerospace, etc., differences are as follows:

Parts#	Max working speed	Working life	Torque	Electrical noise①@10Rpm
MSP260	150RPM	10 million	0.1 N·m	10mΩ
MSP2609	400RPM	400 billion	0.05 N·m	4mΩ

Part# Explanation

MSP260 Part# Explanation		
Part#	Signal or 10A	Products Level
MSP260	12	Common quality
MSP2609	12	High-end quality

Note: N channels 10A rings parallel can be used as 1 channel N*10A current. For example: 2 rings 10A parallel could be used as 1 wire 20A

Specifications

Electrical Data			Mechanical Data	
Parameter	Value		Parameter	Value
	Power	Signal		
Rated Voltage	0~440VAC/VDC	0~440VAC/VDC	Working Temperature	-30°C~80°C
Insulation Resistance	≥1000MΩ/500VDC	≥1000MΩ/500VDC	Operating Humidity	0~85% RH
Lead Wires	AWG16#Teflon	AWG16#Teflon	Contact Material	Gold-Gold
Lead Length	Standard 300mm (adjustable)		Torque	IP41
Dielectric Strength	500VAC@50Hz , 60s			
Electrical Noise	<0.01Ω			

Lead Wires Color Code

Ring	1	2	3	4	5	6	7	8	9	10	11	12
Code	BLK	RED	YLW	GRN	BLU	WHT	BLK	RED	YLW	GRN	BLU	WHT

(6 wires for 1 group color, from 7-12, repeat the same color as 1...6, indicated with number code pipe)

Options for custom slip ring

Note: it can be customized as below requirements, lead time would increase 3~15 days, price would increase 5%~50%. Most basic parts of slip ring are standard and modularized, which saved costs and lead time.

- 1) Bore size
- 2) Circuits number
- 3) High temperature, high speed etc.