



MG119F Series Stator Flange Slip Rings

MG119F Series Stator Flange slip ring ,OD 119mm.Solid style without through bore ,flange on the bottom of stator.

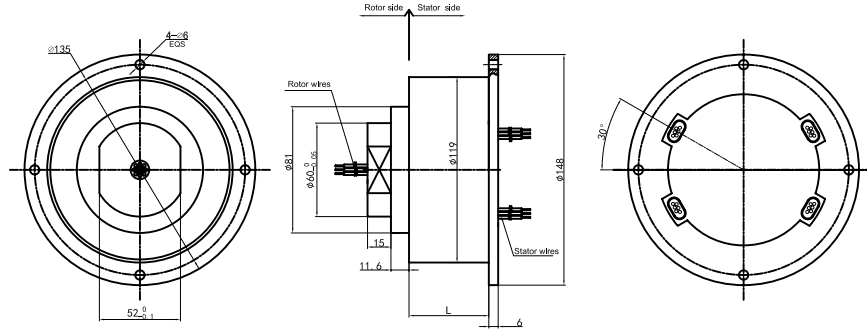

Part# Explanation

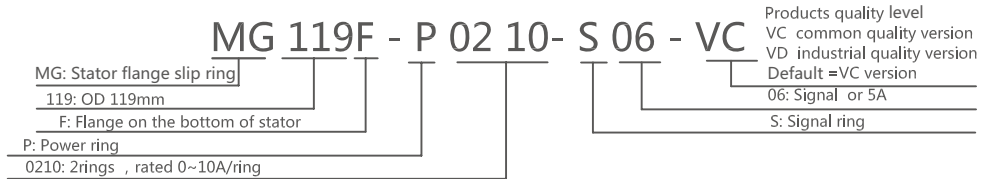

Part# List

MG119 series slip ring part list							
Part#	10A	Signal 5A	Length(mm)	Part#	10A	Signal 5A	Length(mm)
MG119F-S02	0	2	36	MG119F-S36	0	36	169.2
MG119F-P0210	2	0	36	MG119F-P0610-S30	6	30	169.2
MG119F-S03	0	3	39.8	MG119F-P1210-S24	12	24	169.2
MG119F-P0310	3	0	39.8	MG119F-P3610	36	0	169.2
MG119F-S06	0	6	51.2	MG119F-S42	0	42	217.4
MG119F-P0210-S04	2	4	51.2	MG119F-P0610-S36	6	36	217.4
MG119F-P0410-S02	4	2	51.2	MG119F-P1210-S30	12	30	217.4
MG119F-P0610	6	0	51.2	MG119F-S48	0	48	217.4
MG119F-S12	0	12	74	MG119F-P0610-S42	6	42	217.4
MG119F-P0210-S10	2	10	74	MG119F-P0910-S39	9	39	217.4
MG119F-P0310-S09	3	9	74	MG119F-P1210-S36	12	36	217.4
MG119F-P0610-S06	6	6	74	MG119F-P1810-S30	18	30	217.4
MG119F-P0810-S04	8	4	74	MG119F-P2410-S24	24	24	217.4
MG119F-P1010-S02	10	2	74	MG119F-S60	0	60	263
MG119F-P1210	12	0	74	MG119F-P0610-S54	6	54	263
MG119F-S18	0	18	96.8	MG119F-P0910-S51	9	51	263
MG119F-P0210-S16	2	16	96.8	MG119F-P1210-S48	12	48	263
MG119F-P0410-S14	4	14	96.8	MG119F-S72	0	72	312.6
MG119F-P0610-S12	6	12	96.8	MG119F-P0610-S66	6	66	312.6
MG119F-P0810-S10	8	10	96.8	MG119F-P1210-S60	12	60	312.6
MG119F-P1010-S08	10	8	96.8	MG119F-P2410-S48	24	48	312.6
MG119F-P1210-S06	12	6	96.8	MG119F-P3610-S36	36	36	312.6
MG119F-P1410-S04	14	4	96.8	MG119F-S84	0	84	368
MG119F-P1610-S02	16	2	96.8	MG119F-P1210-S72	12	72	368
MG119F-S24	0	24	119.6	MG119F-P2410-S60	24	60	368
MG119F-P0410-S20	4	20	119.6	MG119F-P3610-S48	36	48	368
MG119F-P0610-S18	6	18	119.6	MG119F-S96	0	96	413.6
MG119F-P1210-S12	12	12	119.6	MG119F-P1210-S84	12	84	413.6
MG119F-P1810-S06	18	6	119.6	MG119F-P2410-S72	24	72	413.6
MG119F-P2410	24	0	119.6	MG119F-P3610-S60	36	60	413.6
MG119F-S30	0	30	142.4	MG119F-P4210-S54	42	54	413.6
MG119F-P0610-S24	6	24	142.4	MG119F-S108	0	108	463.2
MG119F-P1210-S18	12	18	142.4	MG119F-P1210-S96	12	96	463.2
MG119F-P1810-S12	18	12	142.4	MG119F-P2410-S84	24	84	463.2
MG119F-P2410-S06	24	6	142.4	MG119F-P3610-S72	36	72	463.2
MG119F-P3010	30	0	142.4	MG119F-P4810-S60	48	60	463.2

Note:1.N rings 10A in parallel can be used as 1 channel N*10A. For example: 2 rings 10A in parallel can be used as 1 channel 20A

2.10A,5A (signal) can combine freely in any way.It can be customized based on standard slip ring,please contact customer service for

more details

Specifications

Electrical Data		
Parameter	Value	
	Power	Signal
Rated Voltage	0~440VAC/VDC	0~440VAC/VDC
Insulation Resistance	≥1000MΩ/500VDC	≥1000MΩ/500VDC
Lead Wire	AWG16#Teflon	AWG22#Teflon
Lead Length	standard length 300mm(adjustable)	
Insulating Strength	500VAC@50Hz,60s	
Electrical Noise	<0.01Ω	
Mechanical Data		
Parameter	Value	
Working Life	See product quality level table	
Rotating Speed	See product quality level table	
Working Temperature	-30°C~80°C	
Operating Humidity	0~85% RH	
Contact Material	See product quality level table	
Housing Material	aluminum alloy	
Torque	0.1N.m;+0.03N.m/6 rings	
Protection Grade	IP51	

Product Quality Level Table

Quality Level Code	Max Rotating Speed	Working Life	Contact Material
VC	250RPM	15 Million Revs	Precious Metal
VD	600RPM	80 Million Revs	Gold-Gold

Lead Wires Color Code

Ring	1	2	3	4	5	6	7	8	9	10	11	12
Color	BLK	RED	YLW	GRN	BLU	WHT	BLK	RED	YLW	GRN	BLU	WHT

(6 wires for 1 group color, from 7-12, repeat the same color as 1...6, indicated with number code pipe)

Options for custom slip ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

- ① Flange size can be customized; cable exit way and cable length can be customized for both rotor and stator.
- ② Because of the structure limitation, length/height/OD can be customized on your request.
- ③ Support current or signal up to 200 rings.
- ④ Aviation plug, terminal and heat-shrink tube are optional.
- ⑤ Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.
- ⑥ Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
- ⑦ Can combine temperature control signal with thermocouple signal.
- ⑧ Special environment can be customized, such as quakeproof, high temperature, etc.
- ⑨ Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- ⑩ High temperature can up to 500 degrees.
- ⑪ High pressure can up to 110KV
- ⑫ Rotating speed can up to 10000RPM
- ⑬ Maximum current can up to 5000 amperes.
- ⑭ Military grade
- ⑮ Optional for underwater IP65, IP68.
- ⑯ Optional for stainless steel housing

Technical support: technical@moflon.com